


# TWN4 MultiTech 2 M

(2<sup>nd</sup> generation)

Multi-frequency RFID module (LF/HF) with NFC and BLE support

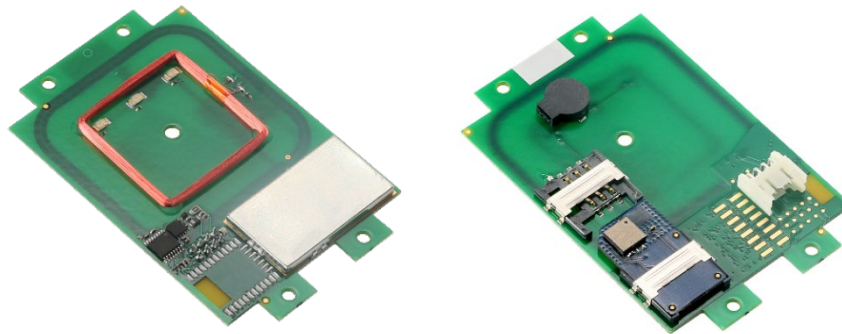

TWN4 MultiTech 2 M  
(exemplary illustrations)

The TWN4 MultiTech 2 family of contactless RFID readers and modules allows users to read and write to almost any LF and HF tags and labels. All products support NFC and, optionally, Bluetooth Low Energy (BLE). In addition, they are also compatible with the two most commonly used smartphone operating systems, Android and iOS, which gives the option to integrate them in mobile identification applications. The desktop readers are available as Plug & Play devices that can be easily customized (i.e. inlay design), whereas the PCB modules offer a large amount of interfaces and a perfect form factor for an easy and quick integration in any host device. This broad range of product features makes the TWN4 MultiTech 2 family an excellent solution for almost every project.

Key features of the TWN4 MultiTech 2 M RFID module include a powerful SDK for writing apps that are executed directly on the module, the possibility to upgrade the firmware in the field, transparent data exchange with the RFID media, and an optimized BLE module. Additionally, the module can read more than 60 RFID technologies from low (LF) and high frequency (HF) bands, including NFC. This gives the option to select as many of the technologies required instead of being forced to select just a few ones.

Special features:

- + Possibility to read more than 60 RFID technologies
- + Two RFID frequencies (125 kHz/13.56 MHz), NFC and BLE
- + Powerful SDK for writing apps which are executed directly on the module
- + Firmware update in the field possible
- + On-board 18 kB flash storage, e.g. for storing user accessible non-volatile data
- + Supports transparent data exchange with RFID media
- + CCID and PC/SC 2.01
- + Bluetooth Low Energy 5.x
- + Compact form factor for easy integration



Elevator



EV Chargers



Access



Shop POS



Fitness Equipment



Ticket POS



PC Log-on



Document Management



Driver ID



Vending



Parking



Gaming



Locker Locks



Time Attendance



Industrial PC

## TECHNICAL DATA

FREQUENCIES	125 kHz (LF) / 13.56 MHz (HF) / 2.4 GHz (BLE)
ANTENNAS	Integrated
DIMENSIONS (L X W X H)	Approx. 76.00 x 49.00 x 10.00 mm / 2.99 x 1.93 x 0.39 inch
POWER	USB: 4.3 V - 5.5 V Generic interface (X1): 3.3 V ± 5% RS-232: requires 5 V external power supply ES1/PS2 classified power source according to IEC 62368-1, short-circuit current < 8 A
CURRENT CONSUMPTION	RF field on: 120 mA typically + 16 mA (BLE) / Sleep: 500 µA typ.
TEMPERATURE RANGE	Operating: -25 °C up to +80 °C (-13 °F up to +176 °F) Storage: -40 °C up to +85 °C (-40 °F up to +185 °F)
RELATIVE HUMIDITY	5% to 95% non-condensing
READ/WRITE DISTANCE	LF and HF: up to 100 mm / 4 inch, depending on environment and transponder BLE: up to several meters/feet
OPERATING MODES (USB)	USB keyboard emulation – USB virtual COM port – CCID / PC/SC 2.01
BLUETOOTH LOW ENERGY	BLE version 5.x
MTBF	500,000 hours
WEIGHT	Approx. 15 g / 0.53 oz (without cable)
SUPPORTED OPTIONS AND TRANSPONDERS	Depending on the firmware version and installed options, ELATEC readers and modules can support a wide range of RFID technologies. Please refer to the relevant ELATEC transponder matrix (available at <a href="http://www.elatec-rfid.com/int/transponder-technology">www.elatec-rfid.com/int/transponder-technology</a> ) for more information about the available options and RFID technologies supported by the product.
OS SUPPORT	Windows 7 (32-/64-bit) and higher versions, Linux, Android <sup>1)</sup> , iOS <sup>1)</sup> , MAC OS X <sup>1)</sup>
PERIPHERAL INTERFACES	USB, RS-232, TTL serial (logic level 3.3 V, CMOS, 5 V tolerant) <sup>1)</sup> , I <sup>2</sup> C <sup>1)</sup> , 4 GPIOs <sup>1)</sup> , Clock/Data <sup>1)</sup> , Wiegand D0/D1 <sup>1)</sup> , 1 free SAM slot <sup>2)</sup> for ID-000 card format
TRANSMISSION SPEED	Host: USB full speed (12 Mbit/s), RS-232: up to 115,200 baud, HF Air: up to 848 kbit/s, BLE Air: up to 100 kbit/s
CERTIFICATION NAME	TWN4 MultiTech 2 M
CERTIFICATIONS	Non-exhaustive list <sup>3)</sup> : CE/RED, FCC, IC, TAA compliant, REACH and RoHS-III compliant
ORDER CODES	T4BO-F7-XB                      Standard reader module T4BO-F7-XBP                     Reader module with P option T4BO-F7-XBPI                    Reader module with PI options

<sup>1)</sup>On request


<sup>2)</sup>The reader module has one free SAM slot only, as one SAM slot is equipped ex-works with a BLE SAM card. It is strictly prohibited to take the BLE SAM card out of the SAM slot.

<sup>3)</sup>The product has been certified for use in many countries and regions. Contact your Sales representative for detailed information about all certifications and approvals granted to the product.

## ACCESSORIES

CABLES AND POWER SUPPLIES	ELATEC RFID readers and modules can be delivered with additional cables or external power supplies. Refer to the data sheet <i>Cables for ELATEC devices</i> for detailed information.
---------------------------	--

## TECHNICAL DRAWINGS

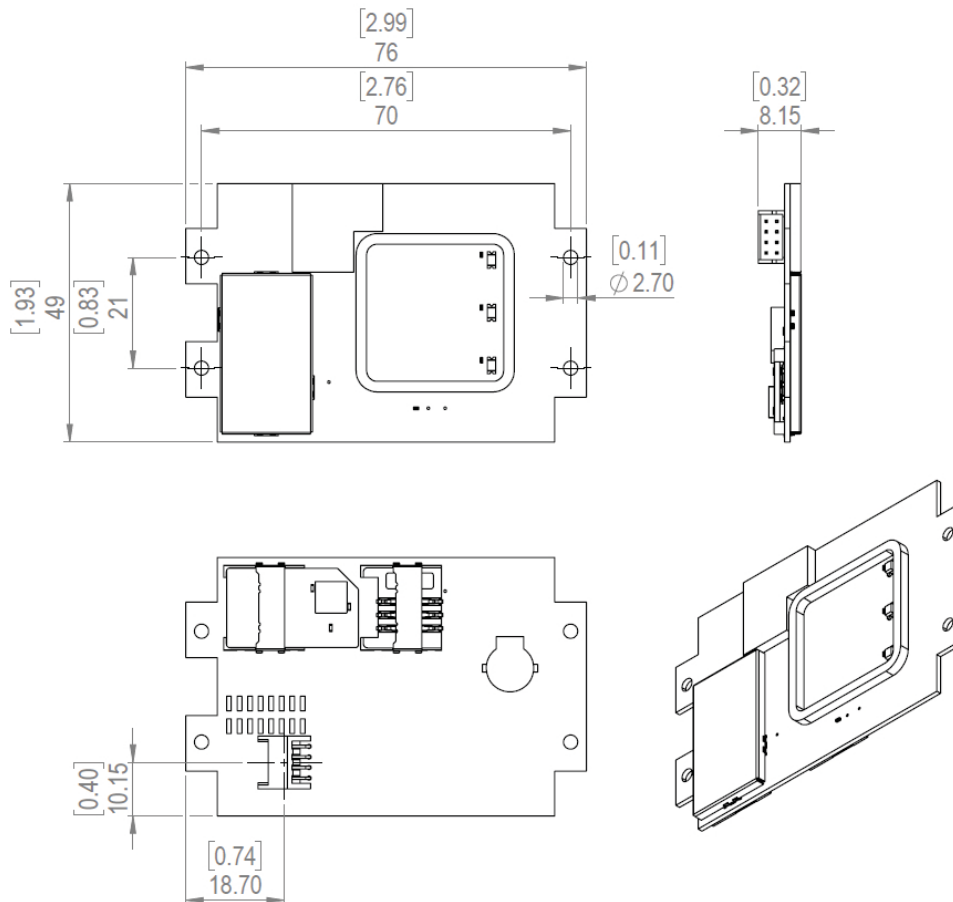

All measures in mm [inch]

# ELATEC

RFID Systems

# ALLEGION™

An Allegion Brand

### HQ / EUROPE

#### ELATEC GmbH

Zeppelinstraße 1  
82178 Puchheim, Germany  
P +49 89 552 9961 0  
F +49 89 552 9961 129  
info.elatec@allegion.com

### AMERICAS

#### ELATEC Inc.

1995 SW Martin Hwy.  
Palm City, FL 34990, USA  
P +1 772 210 2263  
F +1 772 382 3749  
info.elatecus@allegion.com

### APAC

#### ELATEC Singapore

1 Scotts Road #21-10 Shaw  
Centre, Singapore 228208  
P +65 9670 4348

apac.info.elatec@allegion.com

### MIDDLE EAST

#### ELATEC Middle East Trading FZE

P.O. Box 16868, Dubai, UAE  
P +971 50 9322691

info.elatec.ue@allegion.com

[elatec.com](http://elatec.com)

ELATEC reserves the right to change any information or data in this document without prior notice. ELATEC declines all responsibility for the use of this product with any other specification but the one mentioned above. Any additional requirement for a specific customer application has to be validated by the customer themselves at their own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names used in this document are registered trademarks of their respective owners.